


# Stretch Metal Hook-On B (Type 2)

Stretch Metal from Hunter Douglas is a highly versatile designer material giving extra visual effects to ceilings. It is very easy to customise ceilings by varying the types of mesh, their arrangement, the lighting and the colour.

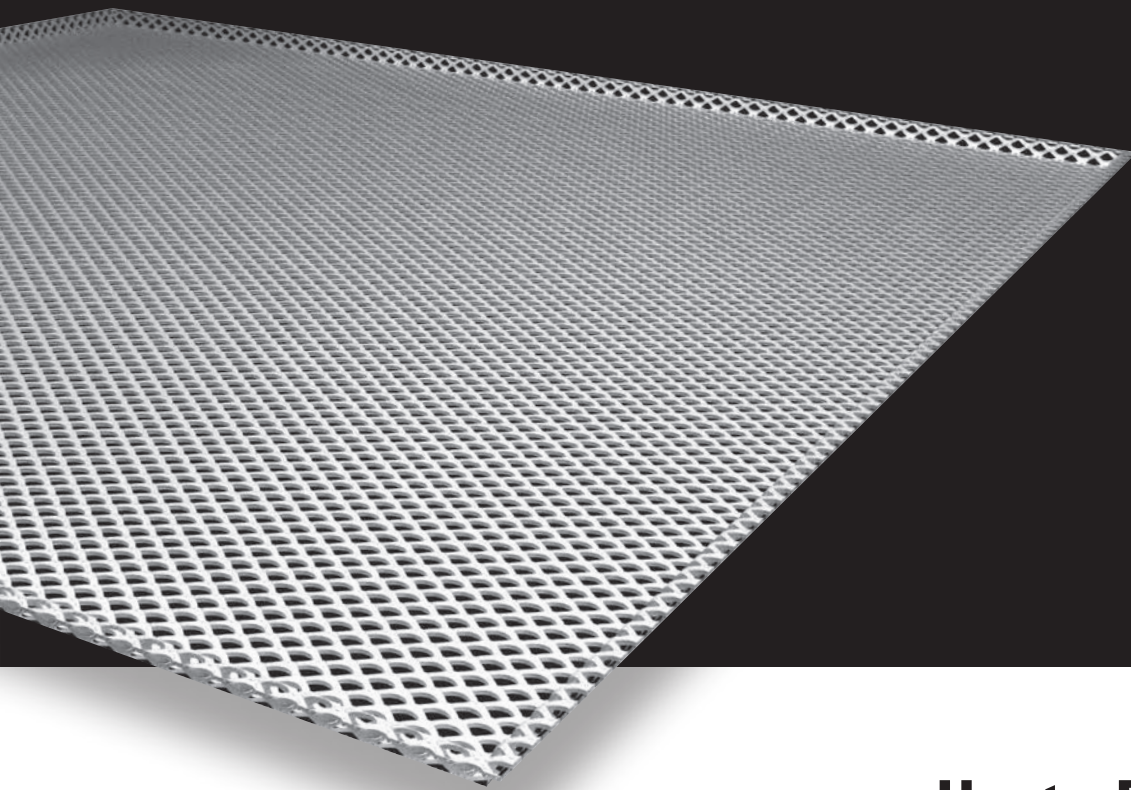


**HunterDouglas**   
Architectural

# Hook-On B (Type 2)

## PLANKS



Stretch Metal planks designed to be installed on conventional hook-on profiles. Application and installation is similar to the Type 1 panels. The difference lies in the type of mesh which is much bigger and cannot be bended over the edges. The mesh sheets on the face of the panels are welded to the steel re-inforcement profiles on the short and long sides. Stretch Metal planks are ideal for solutions where either a high level of acoustic absorption is required or where visual and physical transparency of the ceiling is requested. The systems are also ideal for solutions where regular access into the plenum is required.

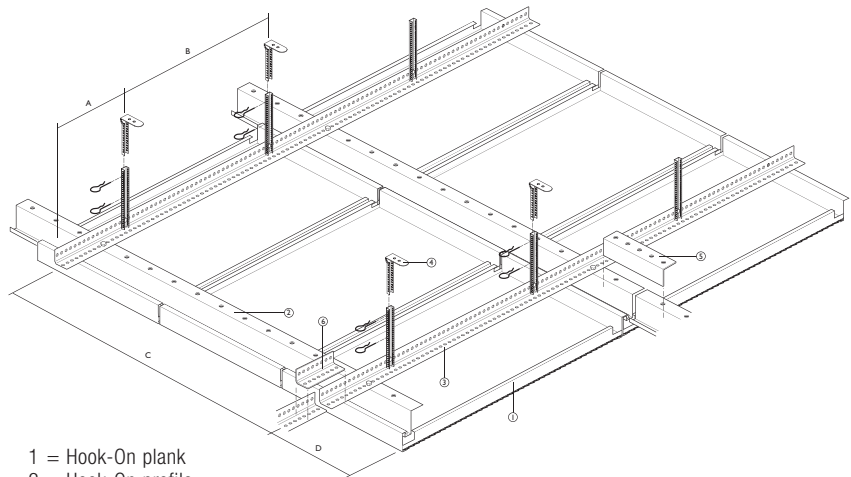

- 1 = Hook-On plank
- 2 = Hook-On profile
- 3 = Primary profile
- 4 = Suspension
- 5 = Hook-On profile splice
- 6 = Primary profile splice

- A = 300 mm (max.)
- B = 1200 mm (max.)
- C = 1200 mm (max.)
- D = 300 mm (max.)


## CONSTRUCTION DETAILS

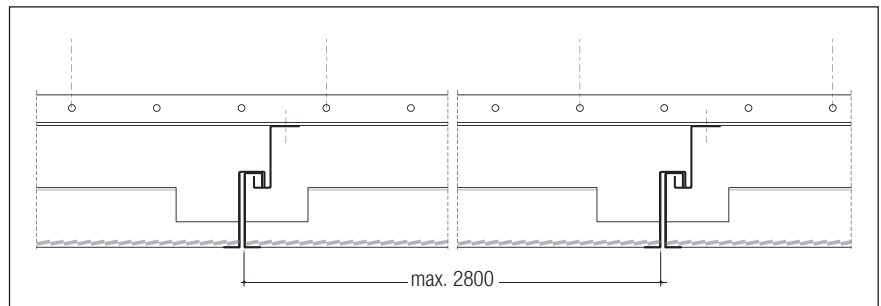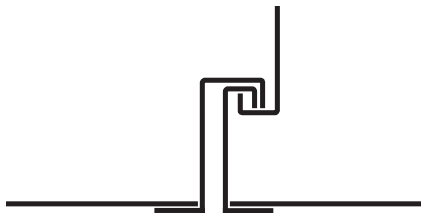

## BASE MATERIAL

Stretch Metal planks are available in steel. The Stretch Metal planks are strengthened with a welded support profile inside (Version-II).

### Version-II: Stretch Metal with welded support profile



## OVERVIEW AVAILABLE EXECUTIONS / MAXIMUM DIMENSIONS

Mesh Type	% Open	Version-II, with reinforcement
New York	48	680 x 2800 mm
Dubai	36	750 x 2800 mm
Moscow	55	728 x 2800 mm
Rotterdam	50	740 x 2800 mm


## MATERIAL REQUIREMENT PER M<sup>2</sup>

		Fe
Components	Unit	Version-II, max 750 x 2800 mm
Stretch Metal Hook-On	pcs	0.48
Hook-on profile	lm	0.36
Hook-on profile splice	pcs	0.07
Primary angle profile	lm	0.83
Primary angle profile splice	pcs	0.17
Suspension	pcs	0.69

# Acoustics

## ACOUSTIC PERFORMANCE

Using acoustic pads on top of the Stretch Metal panels offers exceptional acoustic performance. The thickness of the pads can be chosen depending on the required acoustical values. The acoustic absorption value can reach  $\alpha_w$  1 with an acoustical pad of 85 mm.

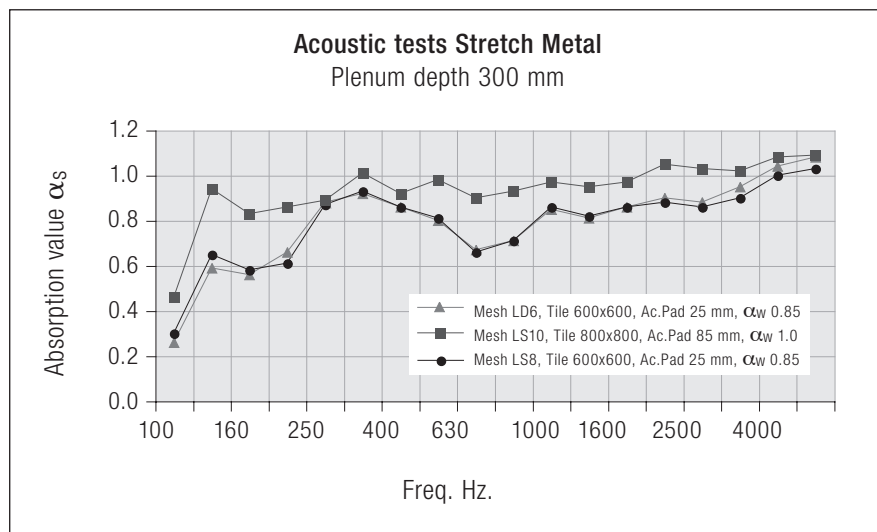

# Material

## TRANSPARENCY

The tiles can be made from various mesh types. This results in different optical effects if the natural or artificial light comes from the plenum. It is important to realise that stretch metal meshes do have a direction. Depending on viewing direction the mesh appears more or less open. This influences light coming through the material but also the visibility of installations in the plenum. The physical transparency can also be used for smoke extraction and sprinkler operation in case of fire.

## FIRE BEHAVIOUR

HunterDouglas® metal ceilings are classified incombustible, and will therefore not contribute to fires. When ceilings need to protect the structural integrity of a building, HunterDouglas® ceilings offer a wide range of practical solutions with regards to fire resistance and fire stability. Further information is available on request.

## COATING

Stretch Metal tiles are all powder coated materials. Durable powder coatings for exterior use are optionally available.

## COLOUR RANGE

The standard colour range consists of RAL and NCS colours, including chrome. Other special colours are available on request.

## QUALITY


Our focus on quality ensures the highest standard of production process, material, machinery and finished product. The superior durability of Hunter Douglas products translates into lower costs during the life cycle of the product due to longer life expectancy and lower maintenance costs. Our company processes are ISO 9001 certified.

## INSTALLATION

It is necessary for all versions that qualitative suspension systems are used. The systems must be stable, aligned and leveled so that they comply with the requirements of the panels. For information on installation, refer to the applicable assembly instruction leaflets.

# Mesh Types Tiles & Planks


Stretch Metal consists of metal sheet with diamond or square shaped holes. The stretch metal material is made with a tool that simultaneously cuts and stretches the sheets. As a result the mesh is created without any waste of material.

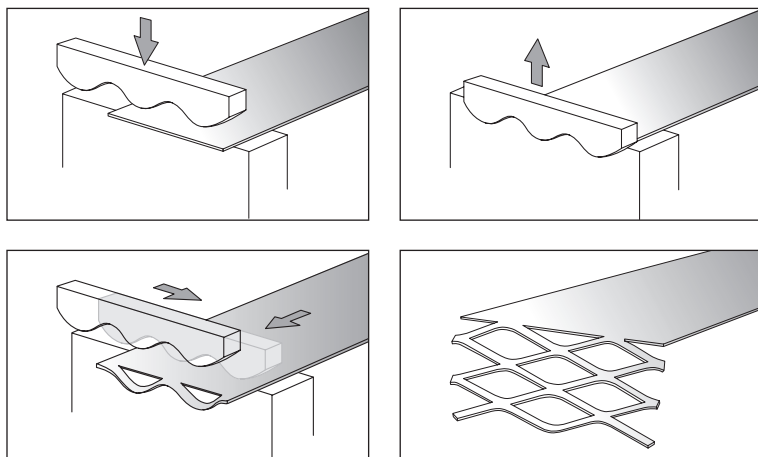

## MESH TYPES

### Standard

The standard mesh types are a square mesh (LS) or a diamond shaped mesh (LD) with a variation in openness of the mesh. The range starts with the smallest LS6/LD6 up to LS16. All mesh types are available in steel, with types LS8 and LS12 also available in aluminium.

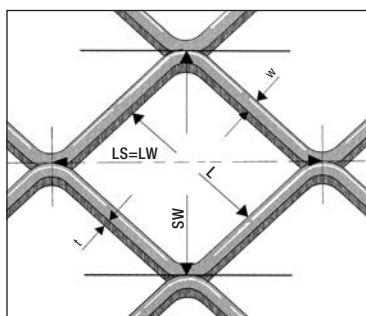


### Key


- LS = LW
- LW = Long diagonal of mesh
- SW = Short diagonal of mesh
- W = Strand width
- t = Strand Thickness
- L = Inner size

### Special


Several other mesh types are available on request, depending on technical requirements and availability. Hexagonal mesh, Round mesh and Ornamental meshes are examples of the possibilities.

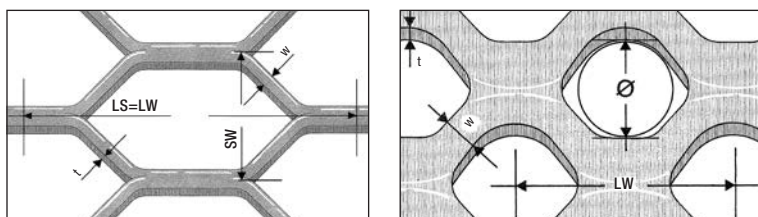


## STANDARD MESH TYPES:

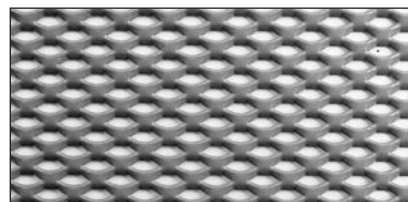

LD6 (Fe) open area 40%, thickness 1.7 mm  
dimensions: 6 x 3.5 - 1.1 x 0.8 - 1.6 kg/m<sup>2</sup>

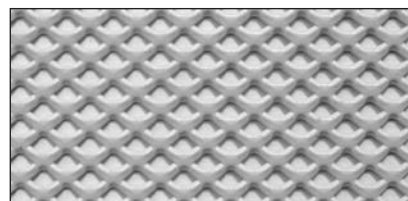


LS6 (Fe) open area 36%, thickness 1.7 mm  
dimensions: 6 x 4.5 - 1.2 x 1.0 - 1.3 kg/m<sup>2</sup>

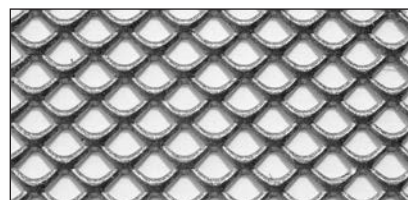


LS8 (Fe+Al) open area 54%, thickness 1.9 mm  
dimensions: 8 x 6.0 - 1.2 x 1.0 - 1.7 kg/m<sup>2</sup>



LS10 (Fe) open area 57%, thickness 2.0 mm  
dimensions: 10 x 7.0 - 1.5 x 1.0 - 1.3 kg/m<sup>2</sup>

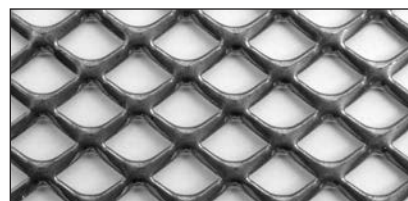

LS12 (Fe+Al) open area 66%, thickness 2.0 mm  
dimensions: 12 x 9.5 - 1.6 x 1.0 - 1.7 kg/m<sup>2</sup>

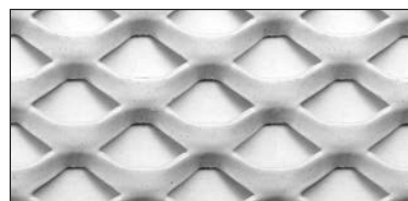


LS16 (Fe) open area 46%, thickness 2.0 mm  
dimensions: 16 x 11.0 - 3.0 x 2.0 - 2.0 kg/m<sup>2</sup>



# Mesh Types Tiles & Planks


Stretch Metal consists of metal sheet with diamond or square shaped holes. The stretch metal material is made with a tool that simultaneously cuts and stretches the sheets. As a result the mesh is created without any waste of material.

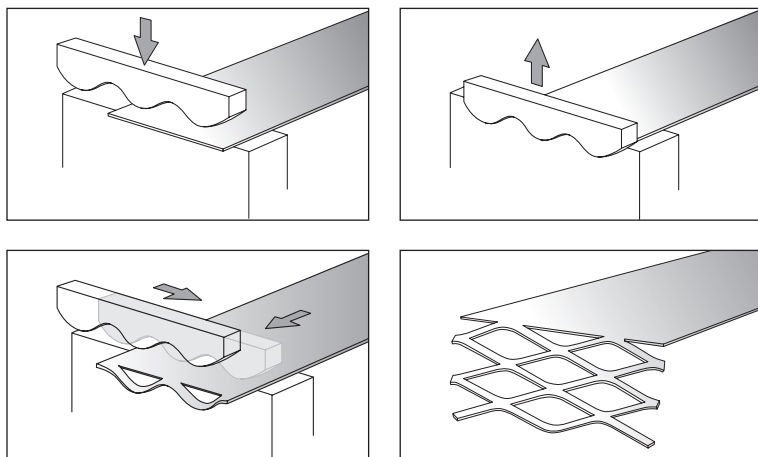

## MESH TYPES

### Standard

The standard mesh types are a square mesh (LS) or a diamond shaped mesh (LD) with a variation in openness of the mesh. The range starts with the smallest LS6/LD6 up to LS16. All mesh types are available in steel, with types LS8 and LS12 also available in aluminium.

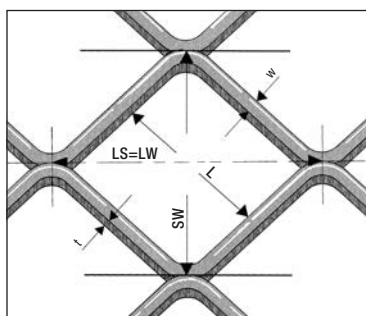


### Key


- LS = LW
- LW = Long diagonal of mesh
- SW = Short diagonal of mesh
- W = Strand width
- t = Strand Thickness
- L = Inner size

### Special


Several other mesh types are available on request, depending on technical requirements and availability. Hexagonal mesh, Round mesh and Ornamental meshes are examples of the possibilities.

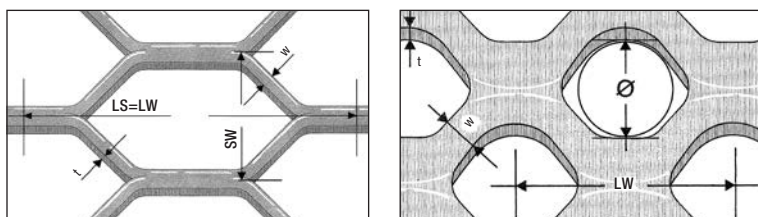


## STANDARD MESH TYPES:

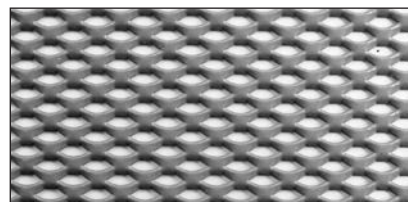

LD6 (Fe) open area 40%, thickness 1.7 mm  
dimensions: 6 x 3.5 - 1.1 x 0.8 - 1.6 kg/m<sup>2</sup>

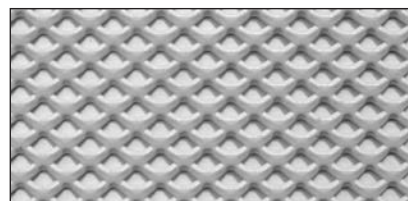


LS6 (Fe) open area 36%, thickness 1.7 mm  
dimensions: 6 x 4.5 - 1.2 x 1.0 - 1.3 kg/m<sup>2</sup>

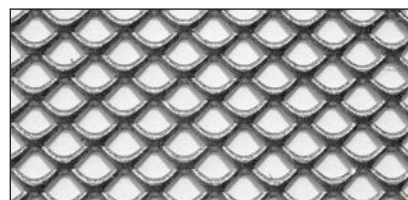


LS8 (Fe+Al) open area 54%, thickness 1.9 mm  
dimensions: 8 x 6.0 - 1.2 x 1.0 - 1.7 kg/m<sup>2</sup>




LS10 (Fe) open area 57%, thickness 2.0 mm  
dimensions: 10 x 7.0 - 1.5 x 1.0 - 1.3 kg/m<sup>2</sup>

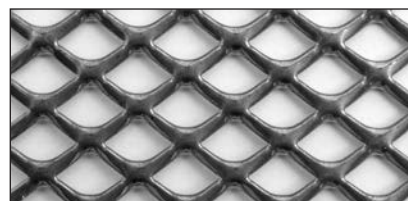


LS12 (Fe+Al) open area 66%, thickness 2.0 mm  
dimensions: 12 x 9.5 - 1.6 x 1.0 - 1.7 kg/m<sup>2</sup>

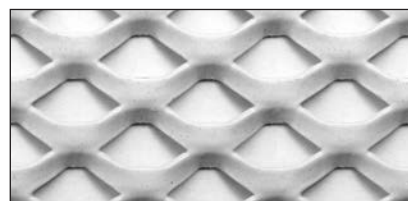


LS16 (Fe) open area 46%, thickness 2.0 mm  
dimensions: 16 x 11.0 - 3.0 x 2.0 - 2.0 kg/m<sup>2</sup>




Wide Panel



Cell | Stretch metal




Linear




Curved



Screen



Exterior



Tiles | XLnt panel

Belgium  
Bulgaria  
Croatia / Slovenia  
Czech Republic  
Denmark  
France  
Germany  
Greece  
Hungary  
Italy  
The Netherlands  
Norway  
Poland  
Portugal  
Romania  
Russia  
Serbia  
Slovakia  
Spain  
Sweden  
Switzerland  
Turkey  
United Kingdom  
Africa  
Middle East  
  
Asia  
Australia  
Latin America  
North America



## Hunter Douglas Architectural

Piekstraat 2  
P.O. Box 5072 - 3008 AB Rotterdam  
The Netherlands  
Tel. +31 (0)10 - 486 99 11  
Fax +31 (0)10 - 484 79 10  
[www.hunterdouglasarchitectural.eu](http://www.hunterdouglasarchitectural.eu)

© Registered trademark - a HunterDouglas® product Pats. & Pats. Pend. -  
Technical data subject to change without notice. © Copyright Hunter Douglas 2018.  
No rights can be derived from copy, text pertaining to illustrations or samples.  
Subject to changes in materials, parts, compositions, designs, versions, colours etc.,  
even without notice. MX800S00